


# chiron

## CNC Machining Centres

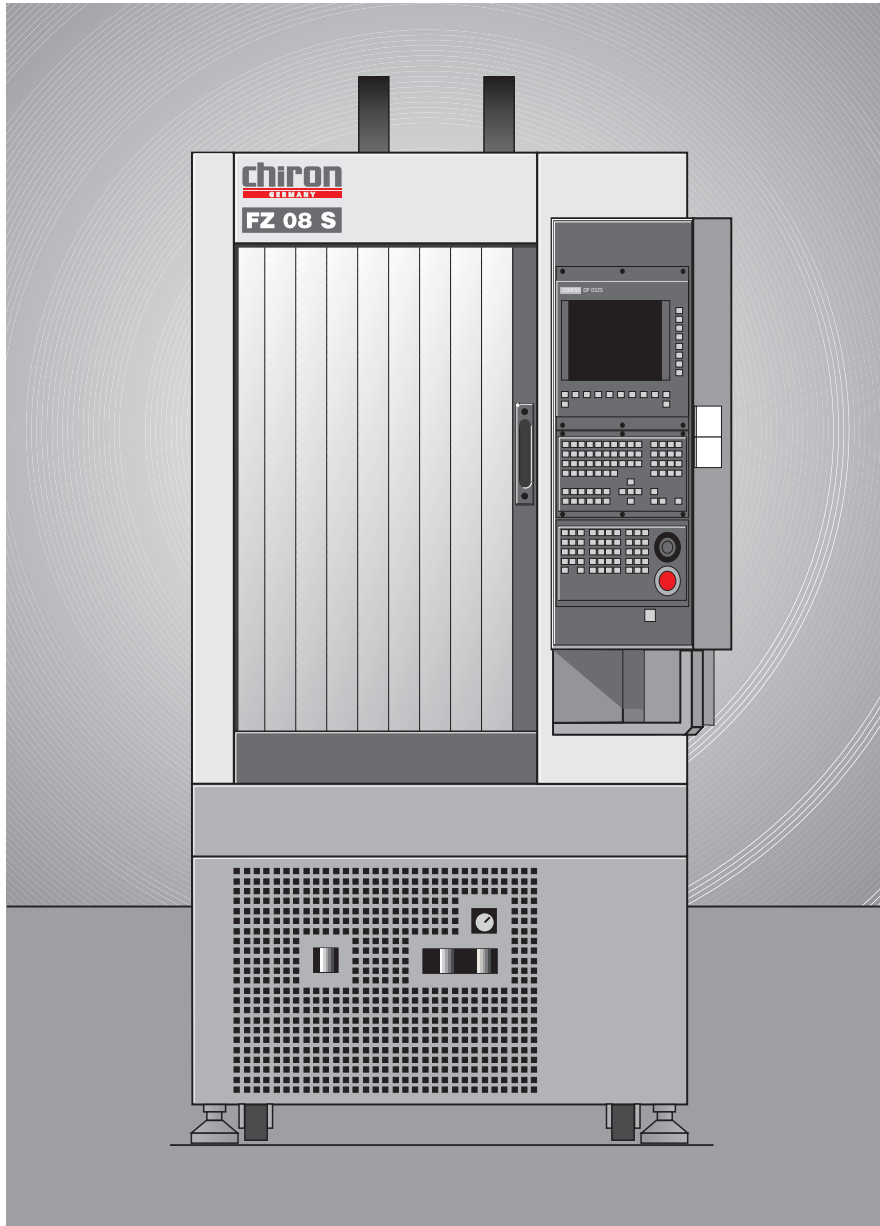

### Datasheet

## FZ 08 S

**NEW**

Tools 24

Through the spindle coolant up to 150 bar

HSK-A 32

Tool change 0.5 s


Chip to chip 1.9 s

Spindle speed up to 27 000 rpm

Rapid Z 60 m/min

## Seconds ahead

## FZ 08 S

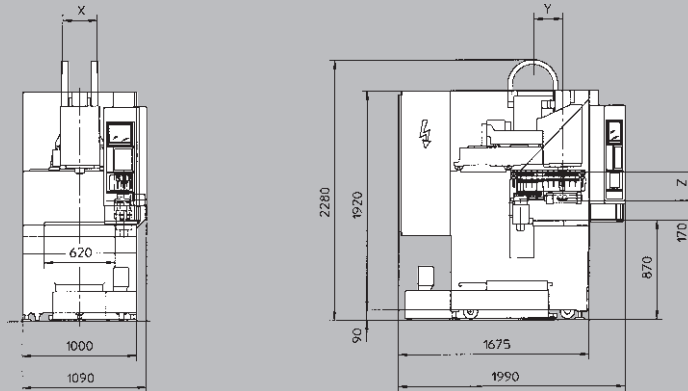


### Technical data


Drilling capacity in ST 60 with HM drill	16 mm
Tapping	M 12
Milling capacity in ST 60	20 cm <sup>3</sup> /min
Tool storage capacity	24
Tool taper DIN 69893	HSK-A 32
Max. tool diameter	40 mm
If adjacent places are free	50 mm
Max. tool weight	0.7 kg
Max. tool length	160 mm
Tool change time	approx. 0.5 s
Chip-to-chip time	approx. 1.9 s
Spindle drive AC	3.7 kW
Infinitely variable speed range	20 - 8500 rpm
Max. torque	23 Nm
Max. speed 8500 rpm	in 0.4 s
Max. tapping	up to 6000 rpm
Diameter front spindle bearing	40 mm
Tool clamping	2500 N
Distance spindle to column	200 - 450 mm
Distance spindle nose to table surface	170 - 420 mm
Travel X-axis	300 mm
Travel Y-axis	250 mm
Feed force X-axis, Y-axis	2000 N
Travel Z-axis	250 mm
Feed force Z-axis	3000 N
Rapid feed rate X-axis, Y-axis	40 m/min
Rapid feed rate Z-axis	60 m/min
Fixed table clamping surface	620 - 270 mm <sup>2</sup>
Dowel and bolt hole pattern	M 16 x Ø 15 <sup>H7</sup> x 50 mm
Table load	150 kg
Coolant device, container capacity	100 l
Full enclosure	illuminated
Total connected power	approx. 10 kVA
Machine weight	1.5 t
Floor space	1.8 m <sup>2</sup>
Air connection	6 bar

### Options

#### ■ Chiron-laser-control 40

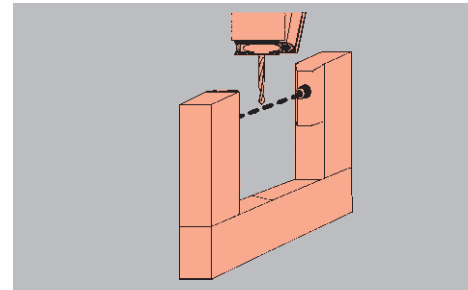

#### ■ 2-axis NC rotary table, 80 rpm option 2000 rpm

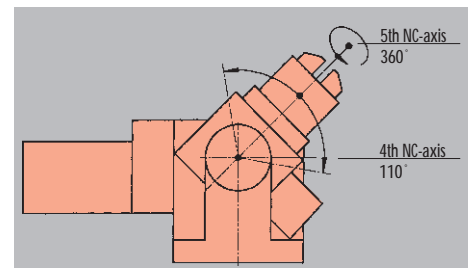

Increased speed range	20 - 15000 rpm	20 - 27000 rpm
Max. torque	23 Nm	8 Nm
Spindle drive AC	7.4 kW	3.7 kW
Max. speed	in 0.36 s	in 1.9 s

- NC rotary table with basic fixture
- Tool changeable speeder head 90000 rpm
- Through the spindle coolant at least 15000 rpm, 70 to 150 bar
- Bar machining
- Electrical interface for robot
- Automatic doors
- Chip conveyor
- Thermocontrol
- Tool life management
- Probe
- Extraction